




COLOURS

AG
Kerbs

TerraKerb®

textured, premium granite kerbs

DIMENSIONS

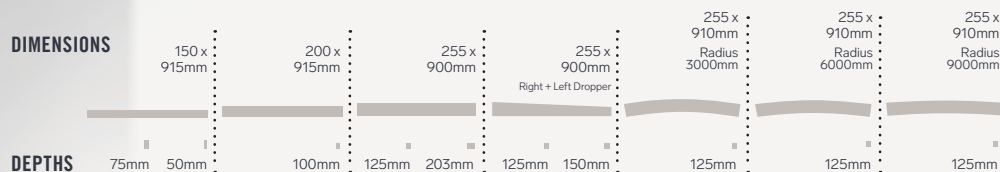

TerraKerb®
colours

COLOURS



SILVER GRANITE



Frost
Resistant



Pedestrian
Use



Light
Traffic




Heavy
Traffic

SPECIFICATION REFERENCE: NBS PLUS: Q10 KERBS/EDGINGS/CHANNELS/PAVING ACCESSORIES -150 BS EN: 1340:2003



T 028 8778 4208 | GB Sales T 0121 747 0202 | E specifications@ag.uk.com


AG.UK.COM

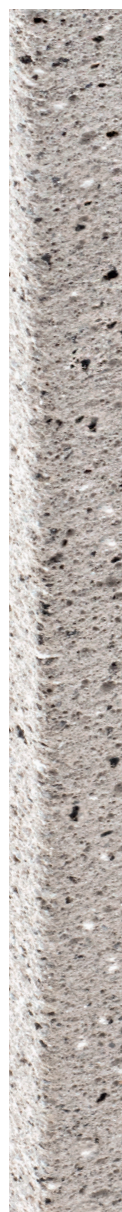

TerraKerb®

textured, premium granite kerbs

DIMENSIONS

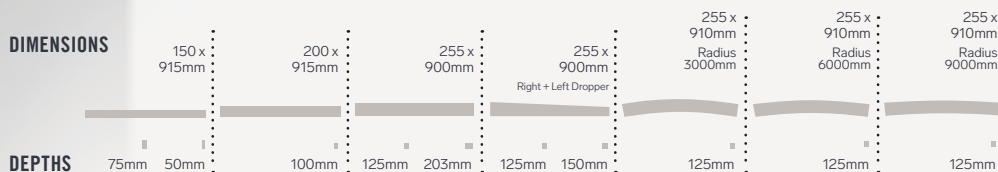

TerraKerb®
stock information

STOCK INFORMATION

Standard Product Length	Height (mm)	Depth (mm)	Length (mm)	Height (in)	Depth (in)	Length (in)	Radius (mm)	Radius (in)	In Stock	Lm. per pack	Units per Lm.	Units per pack (kg)	Unit weight	Weight per pack (t)	Packs per 8 wheeler	Packs per unit lorry
Bullnose Kerbs																
	150	50	915	6	2	36	N/A	N/A	MTO	54.90	1.09	60	15.51	0.95	17	27
	150	75	915	6	3	36	N/A	N/A	MTO	35.70	1.09	39	23.09	0.94	17	27
	200	100	915	8	4	36	N/A	N/A	MTO	27.45	1.09	30	39.78	1.36	10/12	IRE 18 / GB 20
Square Kerbs																
	255	125	900	10	5	35.4	N/A	N/A	MTO	IRE 14.4 / GB 21.6	1.11	IRE 16 / GB 24	60	IRE 0.96 / GB 1.44	10	IRE 16 / GB 24
	255	203	900	10	8	35.4	N/A	N/A	MTO	-	1.09	-	98	-	-	-
Radius Kerbs																
	255	125	910	10	5	36	3000	118	MTO	-	-	-	57.13	-	-	-
	255	125	910	10	5	36	6000	236	MTO	-	-	-	57.13	-	-	-
	255	125	910	10	5	36	9000	354	MTO	-	-	-	57.13	-	-	-
Left Hand Dropper Kerbs																
	255	125	915	10	5	36	-	-	MTO	14.60	1.1	16	54	0.864	17	25
	255	150	915	10	6	36	-	-	MTO	12.80	1.1	14	65	0.910	17	24
Right Hand Dropper Kerbs																
	255	125	915	10	5	36	-	-	MTO	14.60	1.1	16	54	0.864	17	25
	255	150	915	10	6	36	-	-	MTO	12.80	1.1	14	65	0.910	17	24



Frost
Resistant



Pedestrian
Use



Light
Traffic



Heavy
Traffic

SPECIFICATION REFERENCE: NBS PLUS: Q10 KERBS/EDGINGS/CHANNELS/PAVING ACCESSORIES -150 BS EN: 1340:2003




T 028 8778 4208 | GB Sales T 0121 747 0202 | E specifications@ag.uk.com

AG.UK.COM

TerraKerb®

textured, premium granite kerbs

DIMENSIONS

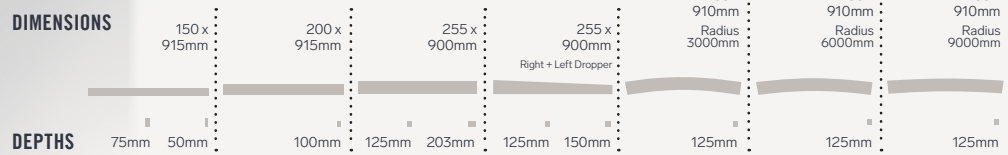

DEPTHS

STANDARDS + PERFORMANCE

Product Type	Exposed Granite + Standard Aggregate Kerb Unit
Manufactured to	BS EN 1340:2003
Surface Layer	Durable, hard wearing with easy maintenance – > 350kg/m ³
Granite Content	Not less than 40% natural granite and quartz aggregate
Efflorescence	N/A
Bending Strength	>3.5Mpa
Slip / Skid Risk	Extremely Low (>75 USRV Textured)
Installed To	BS 7533-6
NBS Plus	Q10 110


MANUFACTURING

Manufactured in our state-of-the-art dry press system using only premium granite aggregates, the textured surface is exposed by our controlled shot blasting process. PLANT OF MANUFACTURE (POM): Bullnose Kerbs: Made at our Ballygawley production plant. Radius Kerbs: Made at our Fivemiletown production plant and finished in our Ballygawley production plant. Dropper Kerbs: Made at our Fivemiletown production plant and finished in our Ballygawley production plant.

CERTIFICATION

ISO 14001	Environmental Management.
ISO 9001	Quality Management.
OSHAS 18001	Occupational Health and Safety Management.
CE Marking	Download our Declaration of Performance (DOP) data at: www.ag.uk.com/cemarking

PROFILES

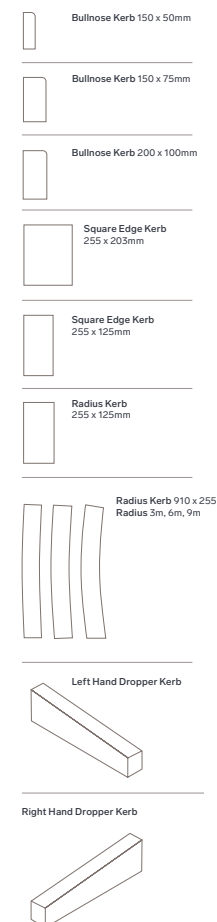

Frost Resistant



Pedestrian Use



Light Traffic



Heavy Traffic

SPECIFICATION REFERENCE: NBS PLUS: Q10 KERBS/EDGINGS/CHANNELS/PAVING ACCESSORIES -150
BS EN: 1340:2003

SUSTAINABILITY

Energy Use	100% renewable
Water Used	100% rain water harvesting
Recyclable	100% of this product can be recycled
Manufacturing	Produced in the UK from locally sourced materials
Non-Primary materials	10% non primary
Waste Wood + Plastic:	100% recycled
Carbon Footprint	6x2: 2.63 Kg CO ₂ / m ² 6x3: 2.94 Kg CO ₂ / m ² 8x4: 7 Kg CO ₂ / m ² 10x5: 10.53 Kg CO ₂ / m ² 10x8: 16.84 Kg CO ₂ / m ²
Carbon Reduction BREEAM	2 Kg CO ₂ / m ² 'A' Rating – in accordance with the BRE Green Guide to Specification. (A+ Rating – when used with recycled sub-base).

