




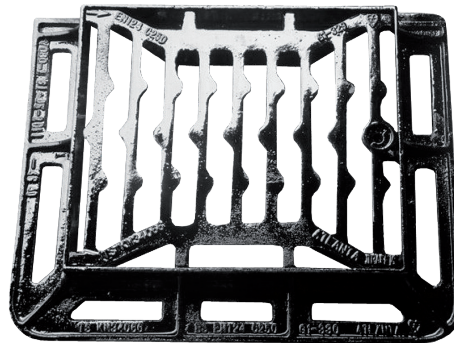


## C250 Gully Grates

**Ductile iron, pedestrianised and locked as standard**

Wrekin's range of BS EN 124:1994 C250 Group 3 Gully Gratings have been designed to provide optimum strength whilst maximising the available drainage area. They incorporate as standard a pedestrianised grid and locking feature.




-  For use in a Group 3 Class C250 environment
-  All fully comply with BS EN 124:1994 and Kitemarked as such by BSI
-  Manufactured from strong and highly durable ductile iron
-  Up to 850cm<sup>2</sup> waterway area
-  Captive hinges reduce theft whilst allowing easy lifting for gully cleaning

### Range details

Wrekin product code	Clear opening size (Cx D mm)	Frame depth (mm)	Over frame size (Ax B mm)	Waterway area (cm <sup>2</sup> )
DGH0C3/3832/K1*	385 x 320	75	545 x 425	750
DGH0C4/3931/KD**	390 x 310	100	590 x 510	850

\* Pedestrianised and locked as standard

\*\* Dished gully top arrangement. Four flanges.



1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.